FIERO 70-Textile collection



NB: The portrayed colours may differ from reality.


70-2500 PRAIRIE SAND


70-2501 PORCELAIN


70-2502 ECRU



70-2503 CLAYSTONE


70-2504 ARTICHOKE


70-2505 COCOA


70-2506 SILVER


70-2507 MIST


70-2508 KOALA

Specification

Name	Fiero	
Width approx.	137 cm - 54"	
Weight approx.	gr / lm oz / lnyd	: 647 : 20.9
Thickness	approx. 0.69 mm	
Composition	linen viscose recycled polyester	: 26% : 54% : 20%
Weaving technique	jacquard woven	
Dyeing	yarn dyed	
Backing	reinforced woodpulp recycled polyester	: 70% : 30%
Repeat approx.	height width	: 19.1cm - 7.5" : 137cm - 54"
Hanging	on repeat, non-reverse	

Scan QR-code for more details, visuals and video content.

Performance	Please contact info@tapetex.com for more detailed test reports.
Surface finish	A stain repellent finish prevents waterbased splashes penetrating and staining the material. Periodic vacuuming is recommended to prevent dust from building up on the materials surface.
Lightfastness	Test result as per ISO 105-B02:2014, Heraeus original Hanau Xenotest.
LRV values	Testing as per BS 8493:2008+A1:2010, Datacolor DC500.
Fire rating	ASTM E84 Class 1 or A and EUROCLASS (B s2 d0).
Permeability rating	Test result 41 as per ASTM E96-12, Method B, Water Vapor Transmission.
Indoor air quality	ASTM D6196 and D5197, Environmental Chamber Test. The testing followed UL 2821 "Greenguard Certification Program Method for Measuring and Evaluating Chemical Emissions".
REACH SVHC	Compliant as per Centexbel testing.



Treated with a stain repellent finish



Lightfastness: as per ISO 105-B02:2014 Xenotest




Light reflection: as per BS 8493: 2008+A1:2010 Datacolor DC500



Fire resistant: EU: B, s2-d0 US: ASTM E84 Class 1 or A



Permeability rating: 41, as per ASTM E96-12 Method B



Indoor air quality: ASTM D6196 and D5197



Sustainability
All materials in this collection come from either 100% renewable natural sources or recycled fibers, ensuring a sustainable approach.
The backing is FSC certified, FSC A000531.
In production, all energy sources are either green, wind or hydro based and all processes are waterbased. The products do not contain PVC, chlorine, plasticizers, heavy metals or harmful dyes.

Supply and packing
Delivery from stock by the full linear meter or full linear yard. The average piece length of this quality is approx. 40 linear meter or 44 linear yards. However, as is common within the textile industry, it is not possible to establish a standard roll length. The wallcovering is reeled on to a cardboard core, wrapped in polyethylene and protective end caps are fixed. Each roll is then packed in individual cardboard boxes or tubes, which are also made out of FSC certified woodpulp.

Harmonized System as per the World Customs Organization and Origin
Textile Wallcovering, paper backed: 5905.00. Made in the Netherlands.

CE EN 15102

REACH

FSC Forest Stewardship Council, Certification FSC A000531.

Carbon Neutral Shipping

PVC FREE

100% BIO BASED


Hanging details

Hanging	On repeat, non-reverse. Precision trimmed for butt-joining by professional paper hangers. Installation advice supplied with every roll. Use rubber roller instead of spatula.
Adhesive	Use a premixed heavy duty, clear vinyl adhesive, suitable for textile wallcovering.
Variation	There can be a variation between sample material and finished product. Stock cuttings are available for approval.



Precision trimmed | Sold by the meter/yard | Use a rubber roller | Do not use a spatula | Apply adhesive on the wall

View

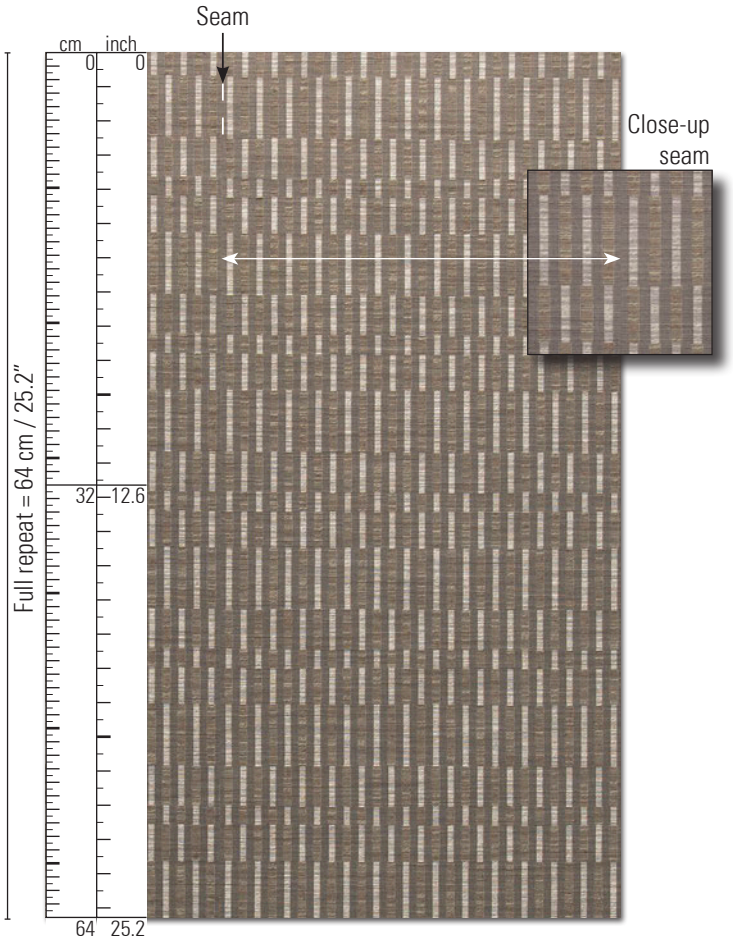



"Proud"

Fiero is a unique wallcovering featuring a dynamic interplay of horizontal and vertical elements.
With its ethnic-inspired motif, it exudes a sense of cultural richness and authenticity, evoking an aesthetic that feels both modern and timeless. Fiero stands proud, rooted in strength, its presence unwavering, unshaken by the winds of doubt.

Fiero 70-2504